

OSNOVNI PODACI O PANELIMA ZA SEGMENTNA VRATA

Naša garažna vrata su proizvedena od galvanizovanog čelika, odlikuju se trajnošću, lakim održavanjem i suptilnim dizajnom. Specijalni paneli zaštićeni od uklještenja i sigurnosni uređaji garantuju bezbedno rukovanje vratima.


Standardni Panel
(Model: CKM100)




Panel sa zaštitom
od uklještenja
(Model: CKM200)



1. Granulirana površina panela
2. Galvanizovani čelik debljine 0,33mm i poliuretanska pena gustine 40kg/m³ daju vratima snagu, zvučnu i toplotnu izolaciju.
3. Standardna debljina panela rezidencijalnih garažnih vrata je 40mm.
4. 40-milimetarski paneli su isporučivi u dimenzijama do 3500mm širine i 6500mm dužine.
5. Mogućnost izbora više različitih tipova prozora za vaša garažna vrata.
6. Četiri različita dizajna panela pružaju Vam veću mogućnost izbora: S-pravougaonik, L-pravougaonik, sa jednom prugom i sa tri pruge.

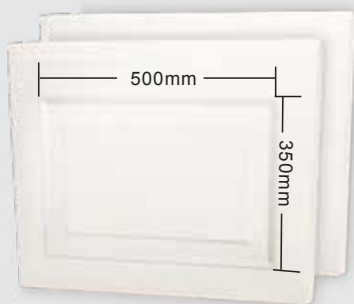

S-pravougaonik

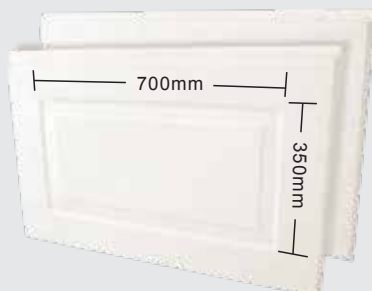


L-pravougaonik



Sa tri pruge



Sa jednom prugom

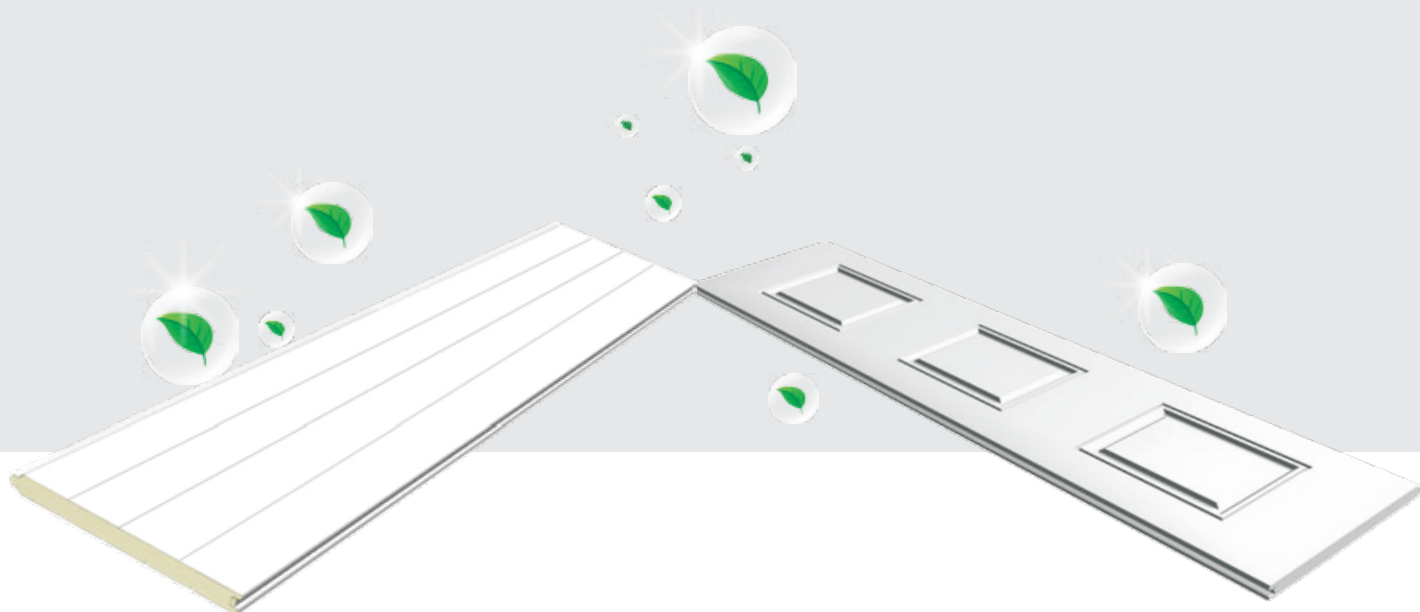

SAVRŠENSTVO JE U DETALJIMA



Zaštita od uklještenja



Savršena bočna strana



Posebno dno vrata



Namenska brava



Bezbedonosni dodaci

STANDARDNE BOJE



Bela



Siva



Braon

LUKSUZNE BOJE



Zlatni Hrast



M16



M2



Crvena Senka